




LISHIDE

Netherlands
www.lishide.com
info@lishide.com

ME serial amphibious excavator
waterways, lakes, shorelines, ponds cleaning
swamp and wet land construction
road building through wetlands
Sand Pumping

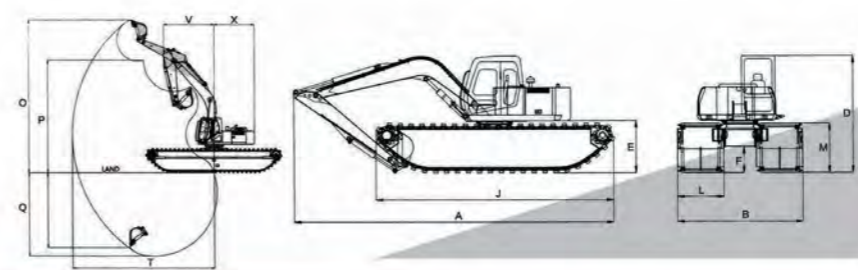

LISHIDE
ME serial amphibious excavator

Dredger with Cutter Suction Pump



Dredging Bucket



Automatically Fuel Oil Pump



Supplementary pontoons can be added on each side to enhance buoyancy force. Spuds for supplementary pontoons overcome buoyancy in deep water and can up to 5meter and 8 meter water depth.



Breaker



MODEL	ME60A- (7M)	ME80A- (9M)	ME160A- (11M)	ME210A- (15M)	ME240A-(15M)
Operating weight (T)	9.5	11.5	21	27	29.5
Bucket capacity (m3)	0.22	0.28	0.45	0.5	0.5
Engine model	YANMAR 4TNV98	YANMAR 4TNV98T	QSF3.8	ISUZU 6BG1 (ISUZU 4HK1)	CUMMIN SQSB7.0
Rated power (kw/r/min)	44/2200	54/2200	86/2200	110/2100 (133/2000)	142/1950
Volume of fuel tank (L)	100	130	247	350	350
Travel speed (km/h)	2.9	2.9	2.79	4.3	5.2、 3.5
Swing speed(r/min)	9.5	12.3	12.6	11.7	11.1
Setting pressure (MPa)	24.5	27.5	34.3	34.3	34.3
Volume of hydraulic tank (L)	80	86	130	246	246
A Overall length (mm)	6950	9770	10350	11450	15150
B Overall width (mm)	3670	4330	4385	5260	5815
D Overall height (to top of cab) (mm)	3650	3700	3950	3950	3950
J Track length (mm)	5450	5450	7180	8540	9770
L Track width (mm)	950	1300	1370	1830	1830
M Track HIGHh (mm)	1500	1640	1760	1850	1850
O Max. digging height (mm)	6370	9670	11110	13600	14070
P Max. dumping height (mm)	4570	7600	9100	11200	11200
Q Max. digging depth (mm)	3100	5870	6955	10700	11074
T Max. digging reach (mm)	6170	9065	10825	15100	15100
V Min. swing radius (mm)	2380	3480	2680	3640	3975
X Distance from swing center to rear (mm)	1700	2205	2205	2870	2960
Arm length (mm)	1630	2250	4500	6300	6300
Boom length (mm)	3000	5850	6000	8200	8200
Max float force(T)	8.5	11.5	21	29	43
Max water depth (mm)	1000	1200	1500	1500	1500